


- Precision power vise with adjustable torque



Outward Drawing

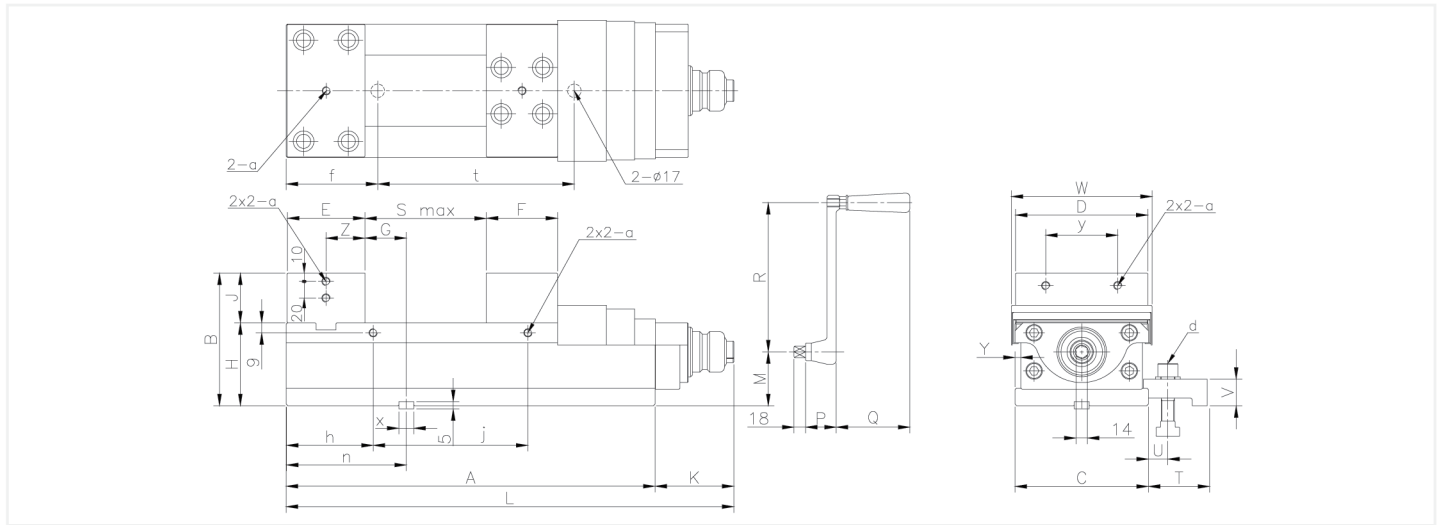

Dimensions

[UNIT : mm]

Model	A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S	T	U
PVS-100(4")	285	115	103	100	73	64	39	75	40	99	384	43	15	30	73	180	150	60	14~26
PVS-125(5")	400	135	126	125	84	76	60	85	50	99	499	50	21	30	73	180	230	72	15~31
PVS-160(6")	490	160	161	160	94	86	50	100	60	99	589	65	21	37	95	180	300	72	15~31
PVS-200(8")	533	180	202	200	102	98	74	110	70	99	632	75	21	37	95	180	320	72	15~31
PVS-250(10")	705	195	252	250	120	120	100	115	80	99	804	75	21	37	95	180	450	72	15~31

Model	V	W	X	Y	a	b	f	g	h	i	n	r	t	y	Weight(kg)
PVS-100(4")	23	109	14	5	M8	M12X45	80	12	80	70	112,5	217,5	150	60	25
PVS-125(5")	30	135	18	6	M10	M16X65	90	12	95	70	145	354	240	60	43
PVS-160(6")	30	170	18	6	M10	M16X65	100	12	105	140	145	444	265	100	65
PVS-200(8")	30	214	18	7	M10	M16X65	100	12	125	140	177	455	350	120	100
PVS-250(10")	30	267	22	7	M10	M20X65	150	12	140	140	221	583	405	130	150

Specifications

[UNIT : mm]

Model	Jaw Width	Jaw Height	Max. Opening	Total Height	Slider Height	Total Width	Total Length	Max. Gripping Force KN(kgf)	Weight (kg)
PVS-100(4")	100	40	150	115	75	109	384	30[3061]	25
PVS-125(5")	125	50	230	135	85	135	499	35[3571]	43
PVS-160(6")	160	60	300	160	100	170	589	60[6122]	65
PVS-200(8")	200	70	320	180	110	215	632	60[6122]	100
PVS-250(10")	250	80	450	195	115	267	804	80[8163]	150